



24RSLABMABM Specifications



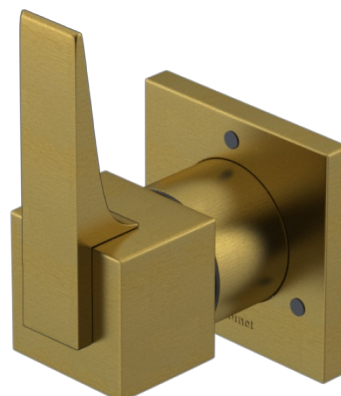

Three Way Diverter with Shut-Offs in Between Functions (Trim Only)

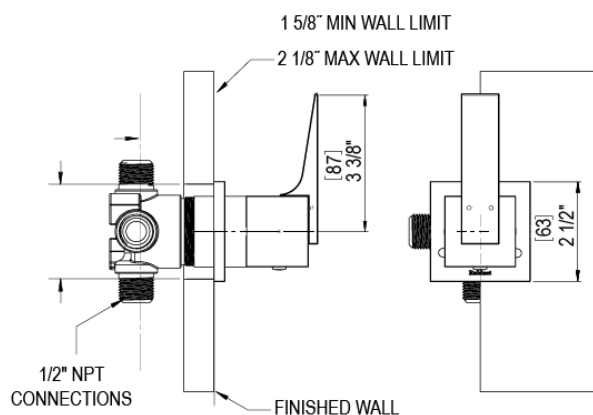



Features

- Flow rate: 2.5/1.8 gpm




Shower head with arm and flange- 8" Wall Mount

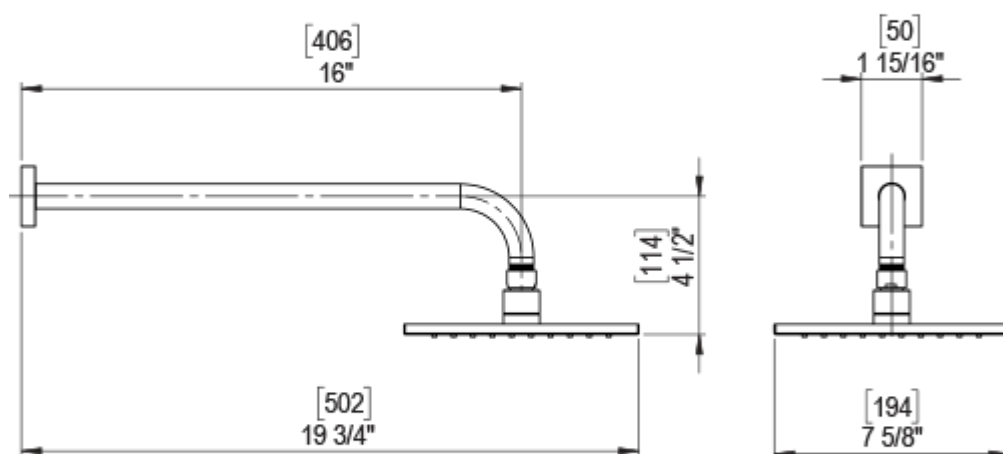

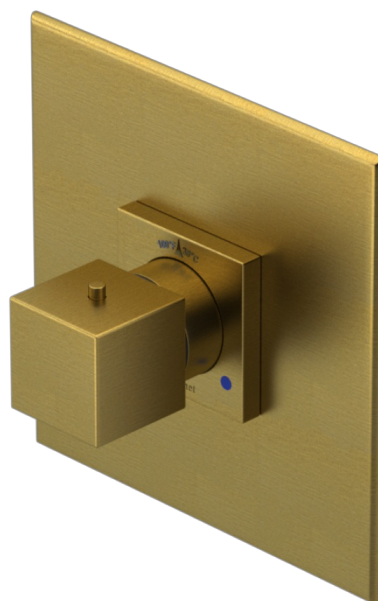

TEMPERATURE CONTROL VALVE WITH STOPS

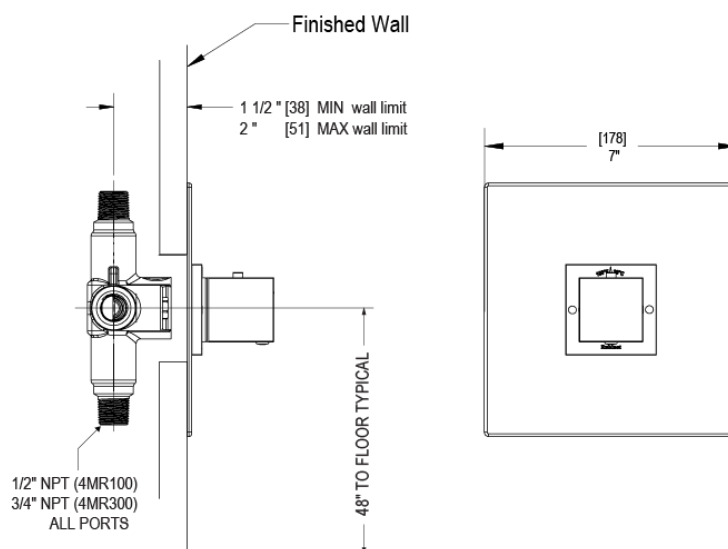



INTEGRAL SUPPLY WITH 1/2" NPT X 1/2" NPSM X 3" NIPPLE

